



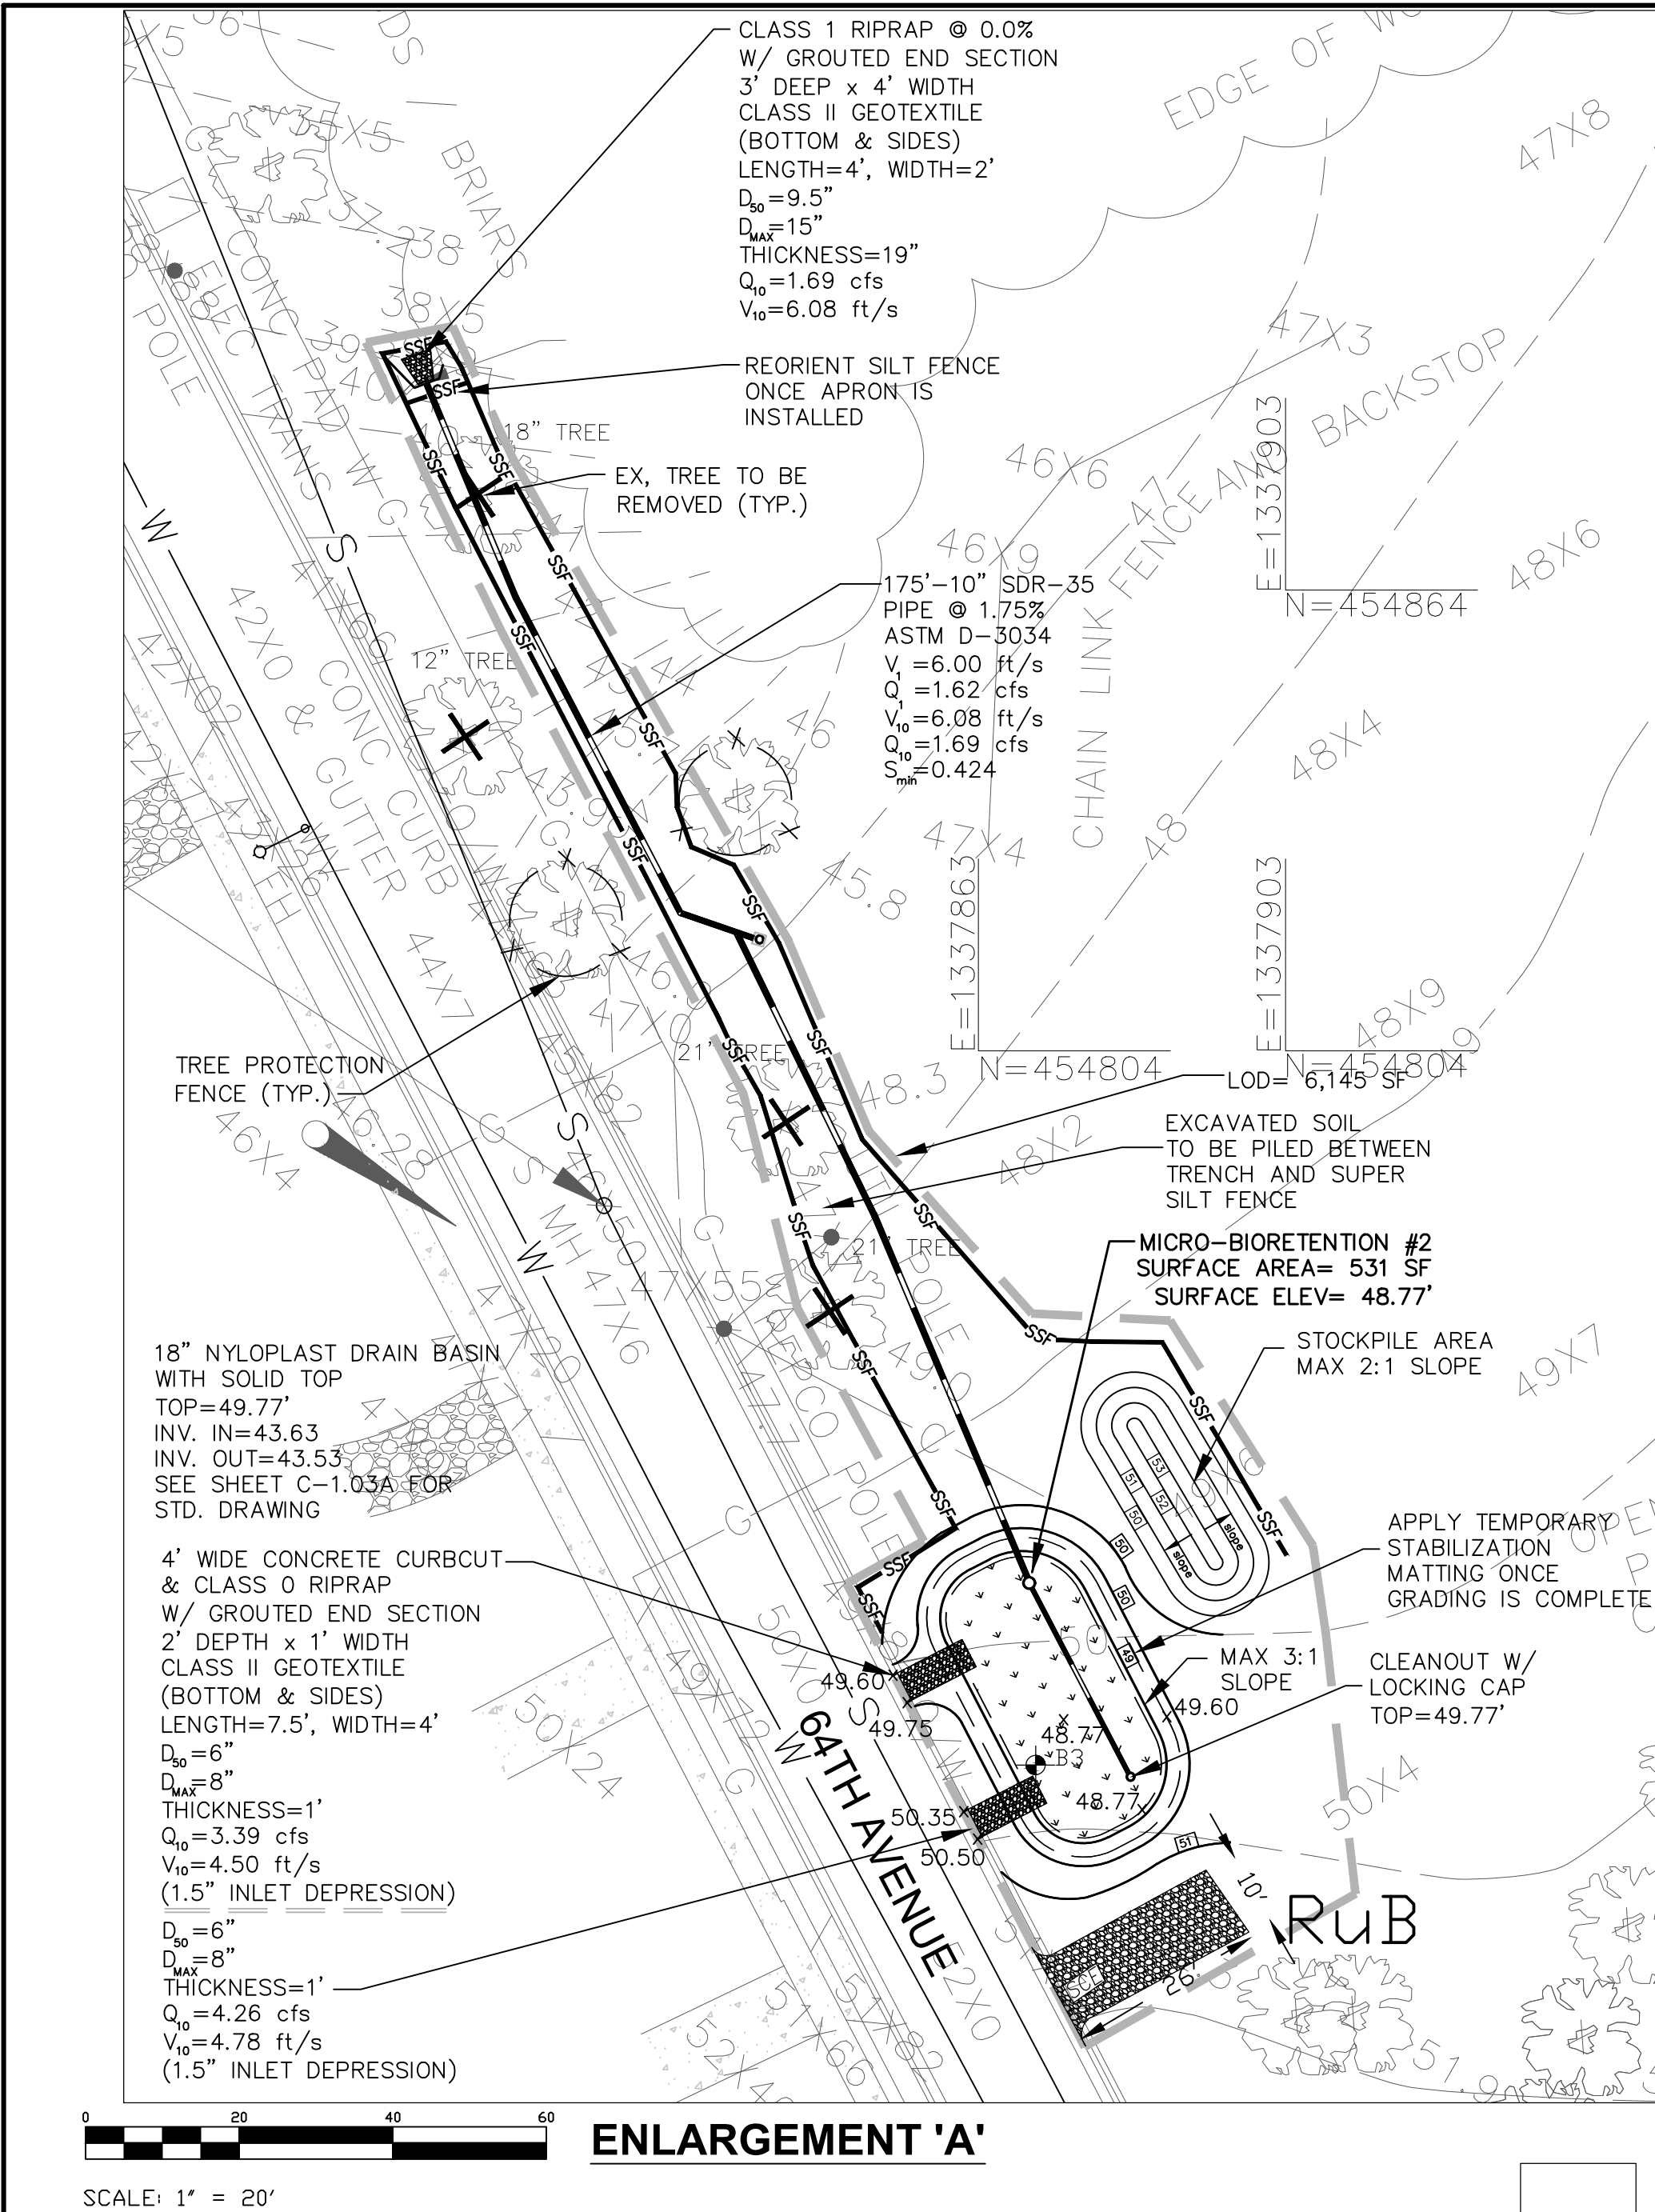

DRAINAGE AREA SOILS:

RuB - RUSSET-CHRISTINA-URBAN LAND COMPLEX, 0-5 PERCENT SLOPES (28.3%)

CcE - CHRISTINA-DOWNER COMPLEX, 15-25 PERCENT SLOPES (71.7%)

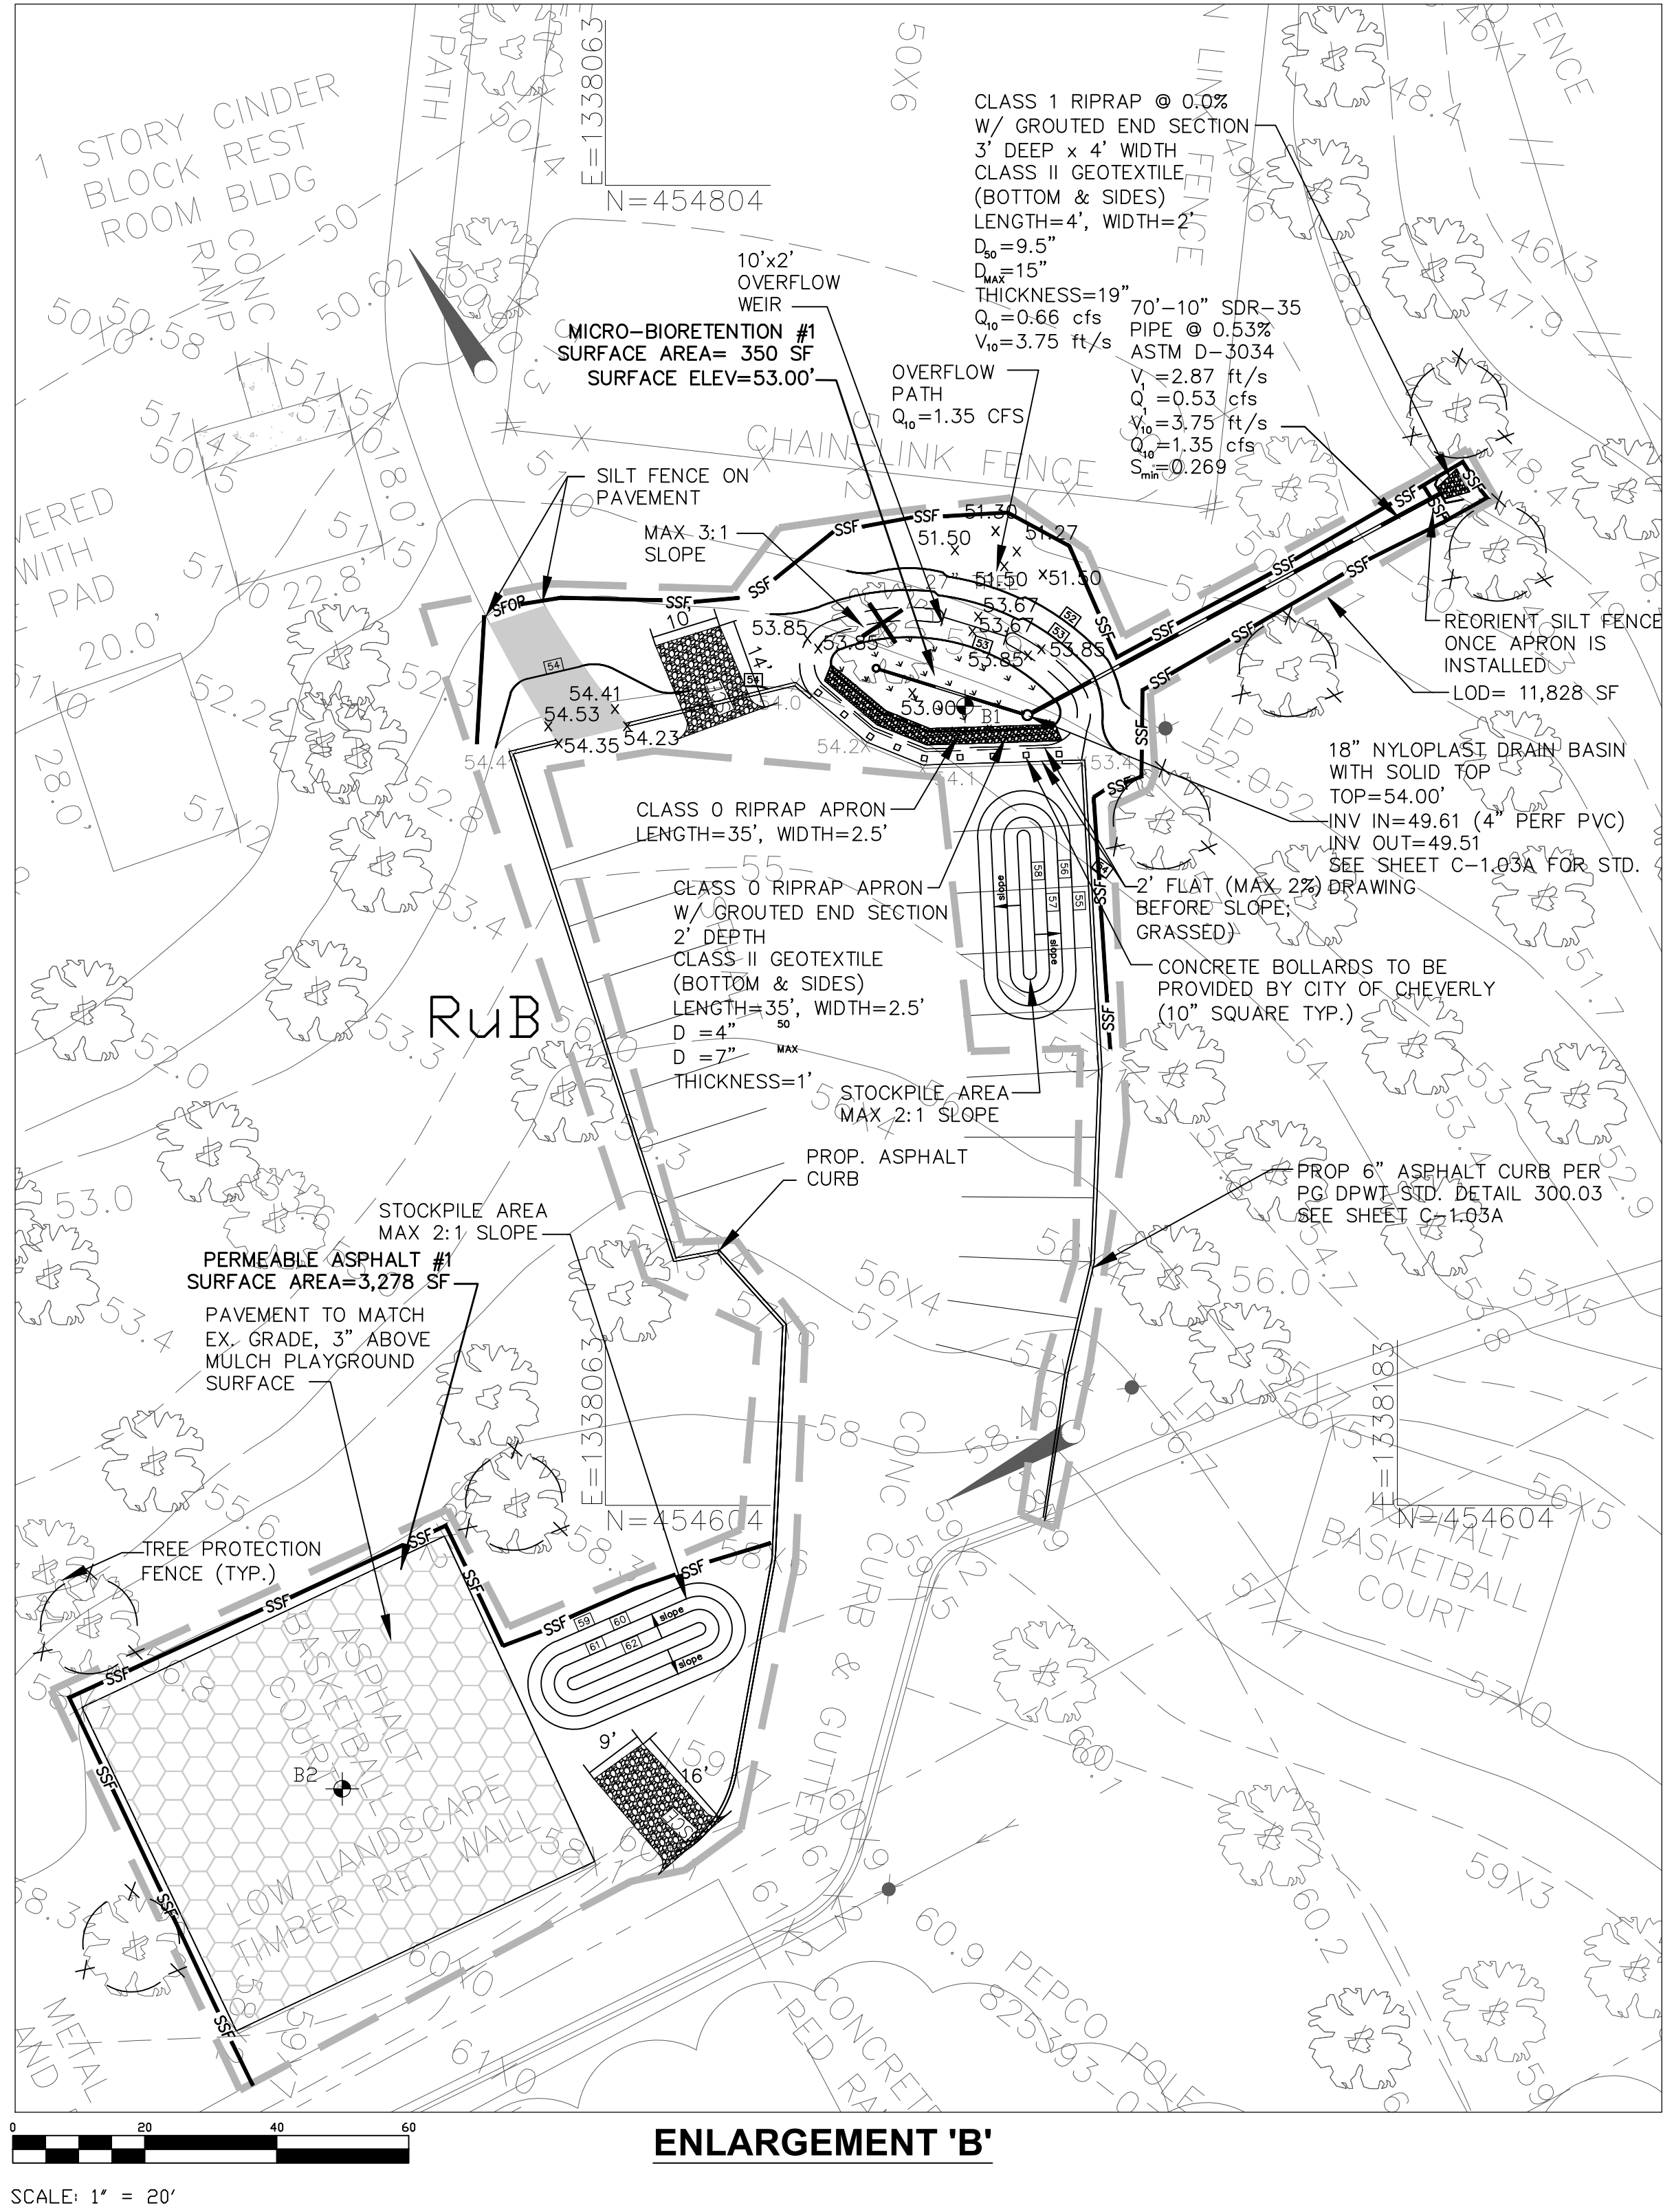

LEGEND:

- EX. CONTOUR
- EX. PROPERTY LINE
- EX. SPOT ELEVATION
- EX. CANOPY
- EX. TREE
- EX. VEGETATION
- EX. GAS LINE
- EX. WATER LINE
- EX. SANITARY SEWER LINE
- EX. OVERHEAD WIRE
- EX. POWER POLE
- EX. TELEPHONE POLE
- EX. CURB INLET
- EX. WATER VALVE
- EX. GAS VALVE
- EX. SANITARY SEWER
- EX. FIRE HYDRANT
- EX. HEADWALL
- EX. SIGN
- EX. WOODEN FENCE
- SOILS TYPE
- PROP. CONTOUR
- LIMIT OF DISTURBANCE
- SPOT ELEVATION
- RIPRAP
- BIORETENTION
- PERMEABLE PAVEMENT
- STORM PIPE
- SOIL BORING
- SUPER SILT FENCE
- SILT FENCE ON PAVEMENT
- STABILIZED CONSTRUCTION ENTRANCE
- TREE PROTECTION FENCING

BMP & ESD AS-BUILT CERTIFICATION

I HEREBY CERTIFY TO THE BEST OF MY KNOWLEDGE AND BELIEF THAT THE STORMWATER MANAGEMENT FACILITIES (BOTH BMP AND ESD) SHOWN ON THE PLANS HAVE BEEN CONSTRUCTED IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS APPROVED BY PRINCE GEORGE'S COUNTY DEPARTMENT OF PERMITTING, INSPECTION AND ENFORCEMENT.

ENGINEERS NAME HERE
MD. REG. P.E. NO. XXXXX

DATE:

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND, LICENSE NO. _____, EXPIRATION DATE: _____.

***Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.1.08 G regulations by January 9, 2013, regardless of when an erosion and sediment control plan was approved.**

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within:

a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1); and


b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.



LOW IMPACT DEVELOPMENT CENTER

5000 Sunnyside Avenue,
Suite 100
Beltsville, MD 20705

Tel. (301) 982-5559
Fax. (301) 982-9305
www.lowimpactdevelopment.org



MISS UTILITY NOTE

INFORMATION CONCERNING EXISTING UNDERGROUND UTILITIES WAS OBTAINED FROM AVAILABLE RECORDS. THE CONTRACTOR MUST DETERMINE THE EXACT LOCATION AND ELEVATION OF ALL EXISTING UTILITIES AND UTILITY CROSSINGS BY DIGGING TEST PITS BY HAND, WELL IN ADVANCE OF THE START OF EXCAVATION. CONTACT "MISS UTILITY" AT 1-800-257-7777, 48 HOURS PRIOR TO THE START OF EXCAVATION. IF CLEARANCES ARE LESS THAN SHOWN ON THIS PLAN OR TWELVE (12) INCHES, WHICHEVER IS LESS, CONTACT THE ENGINEER AND THE UTILITY COMPANY BEFORE PROCEEDING WITH CONSTRUCTION. CLEARANCES LESS THAN NOTED MAY REQUIRE REVISIONS TO THIS PLAN.

REV. NO.	DATE	REVISIONS PRIOR TO APPROVAL

FINAL
GRADING, EROSION, AND
SEDIMENT CONTROL PLAN
FOR PERMIT ONLY

BOYD PARK / 64TH AVENUE
STORMWATER RETROFIT

1801 64TH AVENUE
CHEVERLY, MD 20785
PRINCE GEORGE'S COUNTY, MARYLAND

ISSUE:	DATE: 02/16/18
SCALE: 1"=20'	SHEET 2 OF 6
FILE NO:	SC-2
DRAFTED: DM	
CHECKED: NW	